


Setting Up Camera and Cables & Powering Up the Camera



Remove plastic lens cap and 5mm black extension ring. Install deluxe 1.25" aluminum adapter. If a MFR-3 focal reducer is to be used, either place the 5mm black or the 10mm aluminum extension ring between it and the camera.

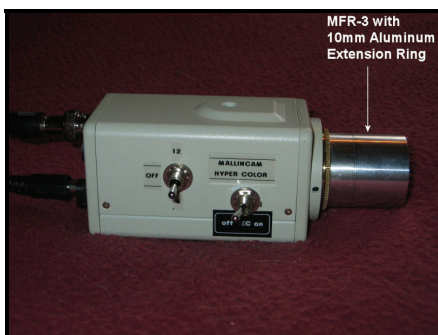


Examine the 25' power/video cable and select the end with a silver BNC twist connector and a male power cable.

1. Connect the silver BNC twist connector to the MallinCam.
2. Connect the male power connector to the MallinCam.



At the other end of the power/video cable:

3. Connect the silver BNC twist connector to the monitor. If the monitor has an RCA jack, use the supplied silver BNC to RCA connector.
4. Connect the female power connector to the power supply and turn on the monitor.
5. Apply power to the MallinCam by plugging in the power supply cube to an electrical outlet.

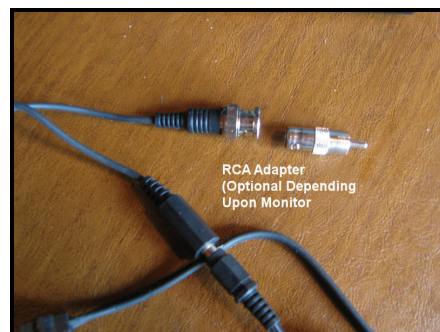

NOTE: The MallinCam power supply cube is always plugged in last during the startup sequence; and it is unplugged first when powering down the system.